

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 February 2005 (03.02.2005)


PCT

(10) International Publication Number
WO 2005/010639 A2

- (51) International Patent Classification⁷: **G06F**
- (21) International Application Number: **PCT/IL2004/000680**
- (22) International Filing Date: **25 July 2004 (25.07.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **157156 29 July 2003 (29.07.2003) IL**
- (71) Applicant (for all designated States except US): **RAFAEL - ARMAMENT DEVELOPMENT AUTHORITY LTD. [IL/IL]; P.O. Box 2250, 31021 Haifa (IL).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ERLICH, Avshalom [IL/IL]; 4 Harimonim, 20496 Rechasim (IL).**
- (74) Agent: **FRIEDMAN, Mark; 7 Jabotinsky St., 52520 Ramat Gan (IL).**
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): **ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**

[Continued on next page]

(54) Title: **PREDICTIVE DISPLAY FOR A SYSTEM HAVING DELAYED FEEDBACK OF A COMMAND ISSUED**

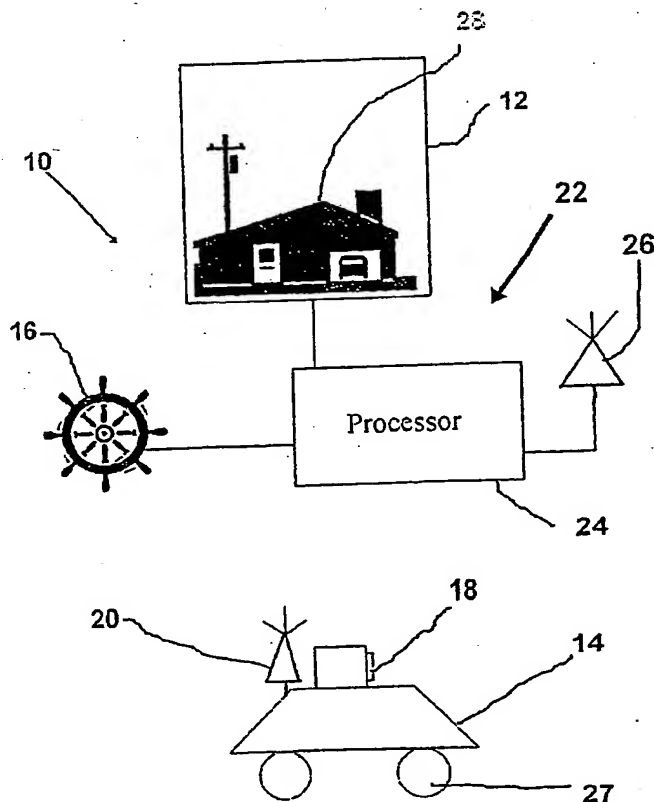

(57) Abstract: A method to provide feedback to an operator of a device having feedback delay. The method includes the steps of displaying a first image of a view from the device, the device being at a first position, issuing a movement command to cause a desired movement of the device to a second position, and displaying a second image of a predicted view from the device at the second position prior to the operator receiving real feedback of the movement command.

WO 2005/010639 A2



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.